

### Specification

Installation: assembling in rigid pipework, for industrial, pneumatic, domestic and hydraulic installations, ecc.

Actuator: 90° rotation of lever



Orifice: from mm. 14,5 to mm. 47

Temperature range: -20° C +120° C

Direction of flow: as desired

Working pressure: PN 16 to 95° C  
PN 10 to 120° C

Thread ends: Gas UNI ISO 228

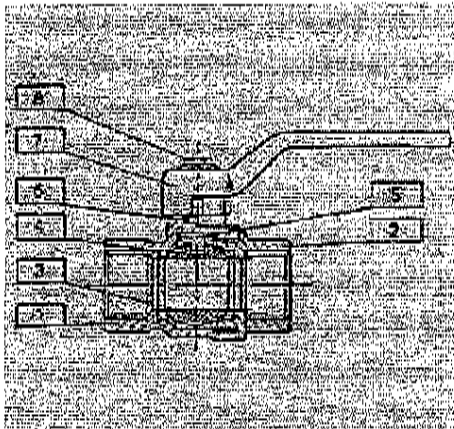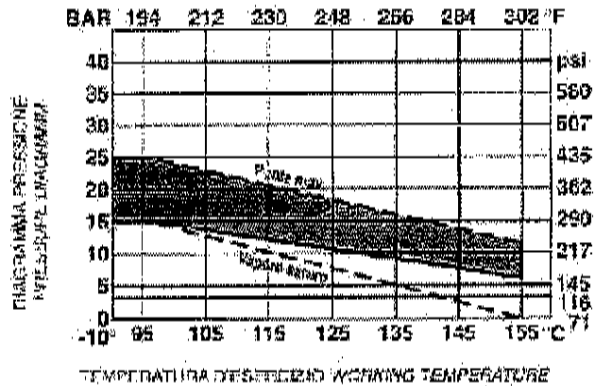

### Description

- 1) Body: hot pressed brass Ms 58
- 2) Nipple: hot pressed brass Ms58
- 3) Ball: brass chrome plated
- 4) P.T.F.E. Ring
- 5) Drawn brass stem
- 6) O-Ring Viton
- 7) Steel lever
- 8) Steel screw

[Back to the product index](#)